SS - 64 To Yaesu FT-227RA Mobile

Pin G of PB-1659C ——————— RED 1

Pin F of PB-1659C ——————— BLACK 2

Pin I of PB-1659C ——————— YELLOW 3

**Optional Use (see SS-64 Instruction Sheet) ——————— ORANGE 4

Optional Use (see SS-64 Instruction Sheet) ——————— GREY 5

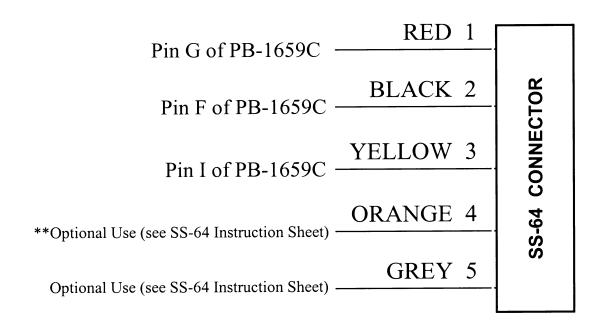**SS-64 CONNECTOR**

Notes

Mount in area (B) where the Yaesu tone was meant to go.

If you want the reverse burst function, follow the directions on the SS-64 instruction sheet to install into your radio's push-to-talk.

** The Orange wire <u>must be grounded</u> to encode tone if jumper JP-1 is out