


+12vdc from on-off switch

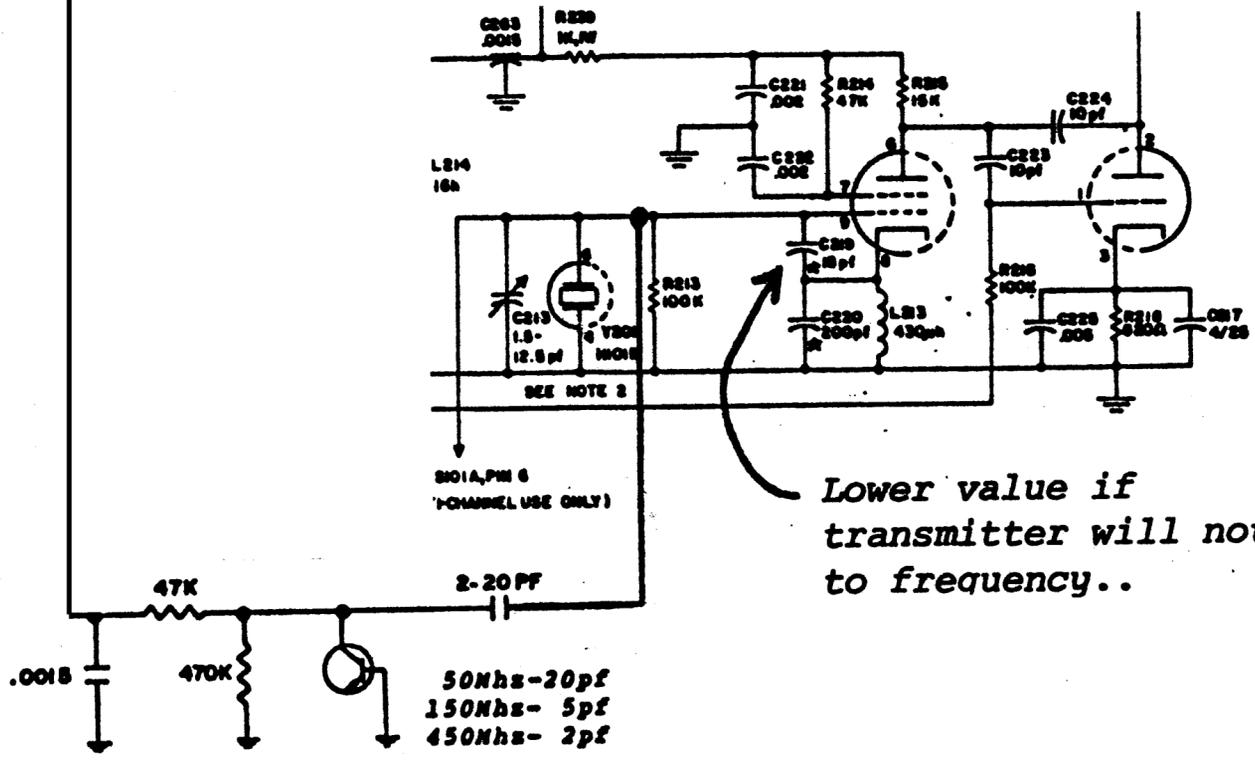

Lower value if transmitter will not come to frequency..

JU-1 - IN
JU-2 - OUT

APPLICATION PARTS
(not supplied)

- 1- Varicap kit
- 1- 1Meg 1/4w resistor
- 1- Set wires & hardware

SPECIAL NOTICE

WHEN MOUNTING THE TS-32 WITH A 90 DEGREE ANGLE BRACKET AGAINST THE PCB, BE SURE TO USE THE TWO FIBER SPACERS PROVIDED BETWEEN ANGLE BRACKET AND PCB. IF THIS IS NOT DONE, THE BRACKET WILL SHORT OUT FOILS ON THE PCB.....