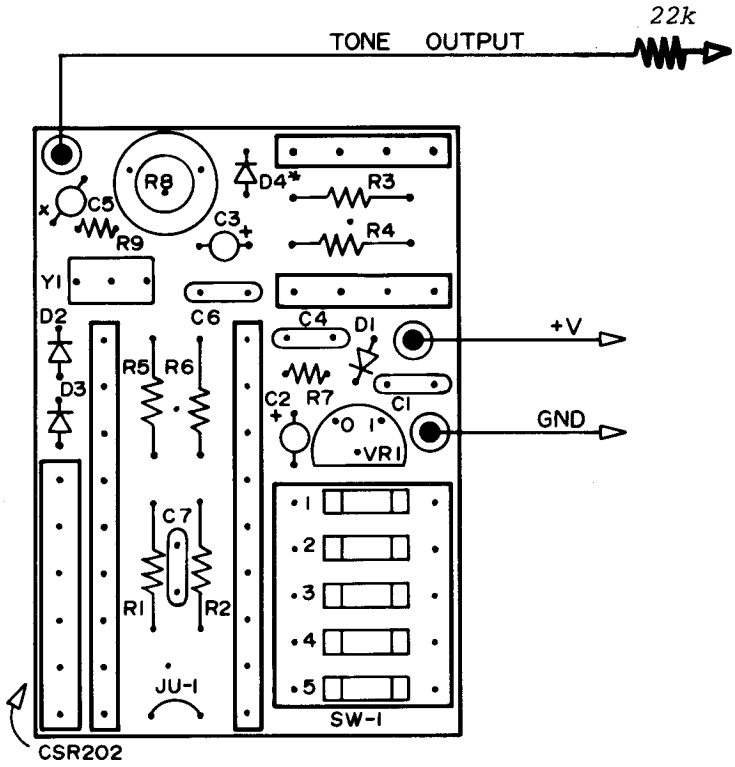

Hook directly to lo side of modulator coil where pre-emphasis parts are connected. Note hi side of coil goes to varicap modulator diode. Shielded wire is NOT required

+10v regulated,keyed or cont.
(Pin 2 of J105 in Exec)
(Pin 14 of J101 in Pro
True Chassis Ground
Not necessarily exciter ground..

PARTS LIST

1- 22k 1/4 resistor