


+12v from switched side of on-off volume switch

+V POWER

Pin 10 on metering socket (disc.)

JU-1 (in)
JU-2 (out)

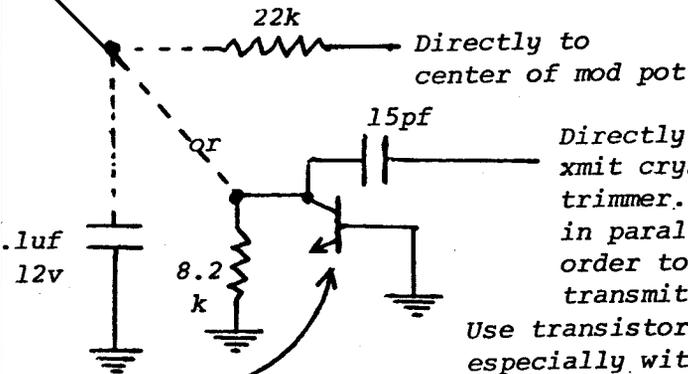

Any NPN silicon transistor with Emitter cut off.

APPLICATION PARTS
(not supplied)

- 1- 22k 1/4w resistor
- 1- .1uF-12v capacitor
- 1- mounting hardware & wires

SPECIAL NOTICE

WHEN MOUNTING THE TS-32 WITH A 90 DEGREE ANGLE BRACKET AGAINST THE PCB, BE SURE TO USE THE TWO FIBER SPACERS PROVIDED BETWEEN ANGLE BRACKET AND PCB. IF THIS IS NOT DONE, THE BRACKET WILL SHORT OUT FOILS ON THE PCB.....



Communications Specialists

426 W. Taft Ave., Orange, CA 92667
(714) 998-3021 (California) / (800) 854-0547