



NOTE: J2 is the call-guard accessory jack

NOTE: Pin 2 must be jumpered to Pin 4 of J2

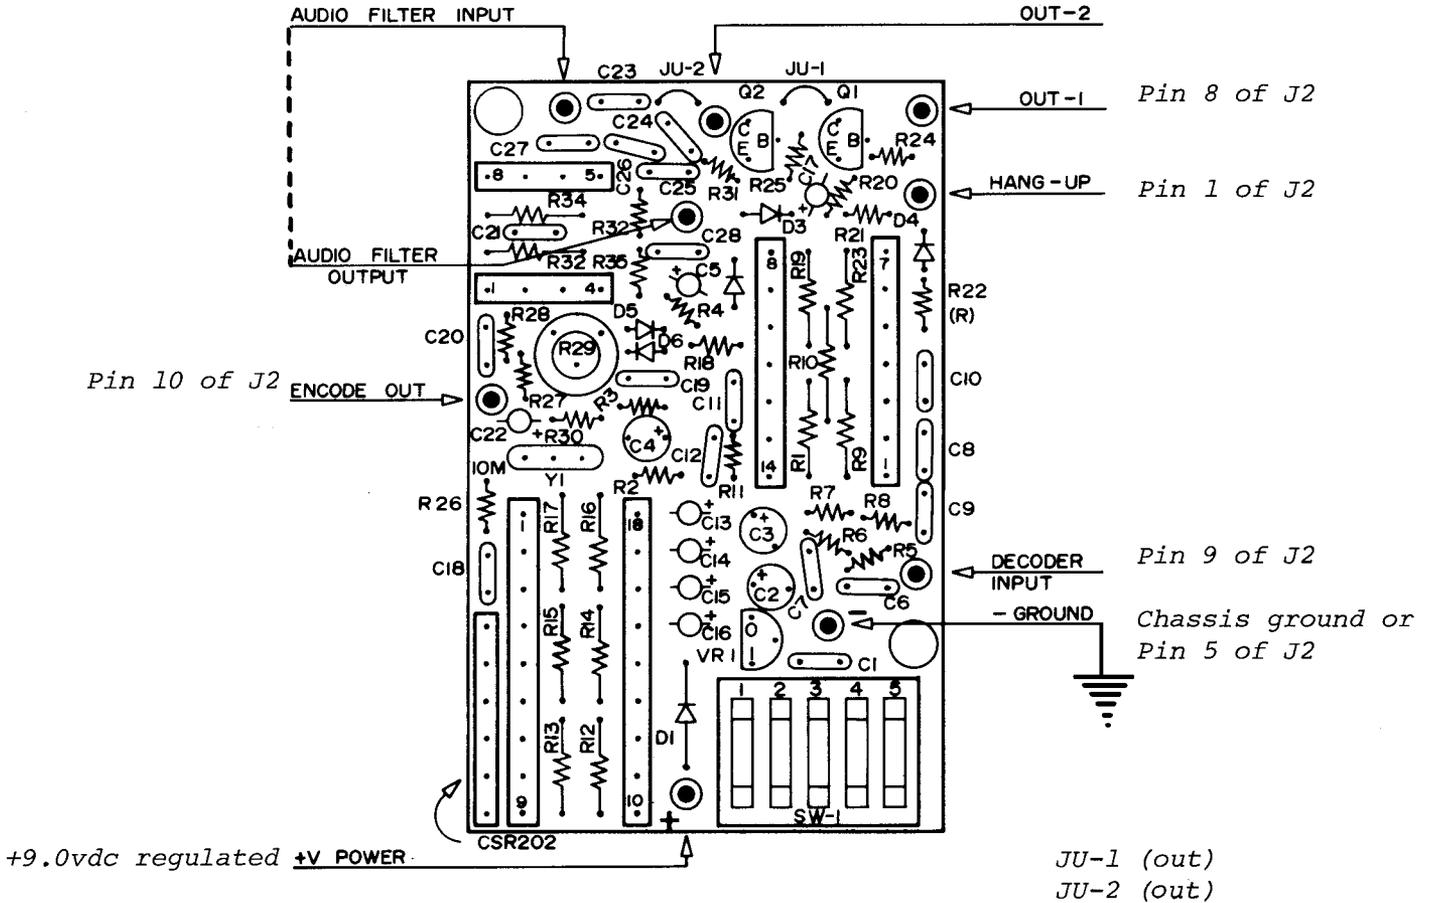

APPLICATION PARTS
(not supplied)

- 1- mounting hardware & wires

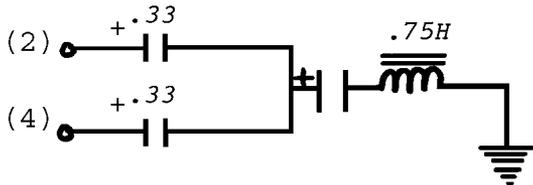

Schematic of passive audio tone filter

SPECIAL NOTICE

WHEN MOUNTING THE TS-32 WITH A 90 DEGREE ANGLE BRACKET AGAINST THE PCB, BE SURE TO USE THE TWO FIBER SPACERS PROVIDED BETWEEN ANGLE BRACKET AND PCB. IF THIS IS NOT DONE, THE BRACKET WILL SHORT OUT FOILS ON THE PCB.....