


PARTS LIST

1- Fleetcom wires & hardware
supplied from factory

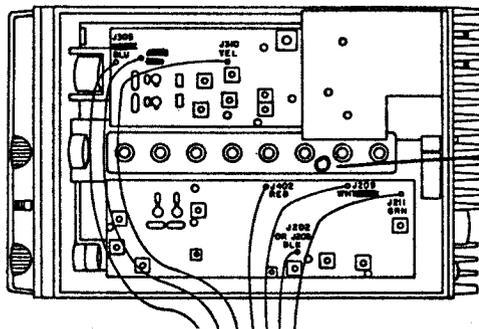

Mounting hole for self-tapping screw which holds assembly that supports the TS-32

NOTE: If it is desired that the "POP" be removed from gating of the audio on & off, add 100uf-16v capacitor from the white gating lead to ground. positive of the capacitor goes to the white lead and the negative goes to ground...

NOTE: If excessive tone "talk off" is noticed, add a 1 meg resistor in series with the Tone Input to the decoder.

SPECIAL NOTICE

WHEN MOUNTING THE TS-32 WITH A 90 DEGREE ANGLE BRACKET AGAINST THE PCB, BE SURE TO USE THE TWO FIBER SPACERS PROVIDED BETWEEN ANGLE BRACKET AND PCB. IF THIS IS NOT DONE, THE BRACKET WILL SHORT OUT FOILS ON THE PCB.....



Communications Specialists

426 W. Taft Ave., Orange, CA 92667
(714) 998-3021 (California) / (800) 854-0547