

# SS - 64 To Kenwood TR-2400A Handheld

9.6VDC (RED) thru a 100uh choke (100pf cap from choke to ground) between choke & SS64

Chassis Ground

Tone Input

Optional Use (see SS-64 Instruction Sheet)

Optional Use (see SS-64 Instruction Sheet)

RED 1

BLACK 2


YELLOW 3

ORANGE 4

GREY 5

SS-64 CONNECTOR

**Notes:** The SS-64 can be located in the space shown in the picture below. The parts in the DC line prevents RF energy from getting back into the encoder when using the 1/4 wave helical wound antenna. We suggest you disconnect the battery pack during installation to prevent the choke in the radios DC line from burning up in the event you should be unfortunate enough to short something to ground.

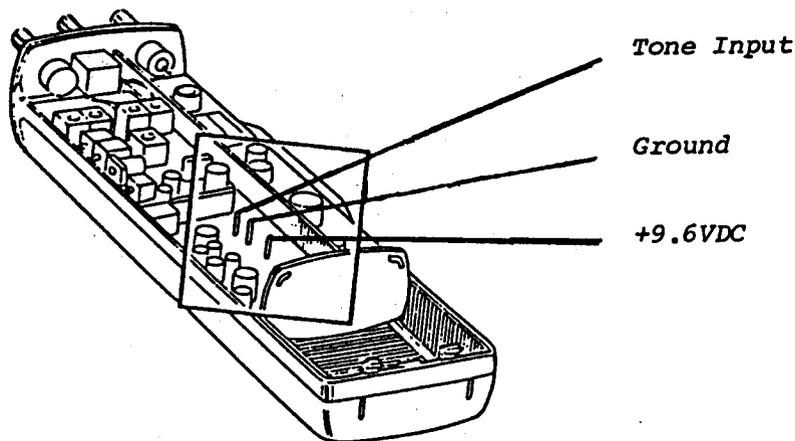

**COMMUNICATIONS SPECIALISTS, INC.**

426 WEST TAFT AVENUE • ORANGE, CA 92865-4296

(714) 998-3021 • FAX (714) 974-3420

Entire U.S.A. (800) 854-0547 • FAX (800) 850-0547

<http://www.com-spec.com>