


NOTE: The SS-32SMP is normally programmed via solder jumpers, however a five position DIP switch may be wired to the program pads for frequency selection. Use DIP switch part no. DS-1.



BOTTOM OF RADIO

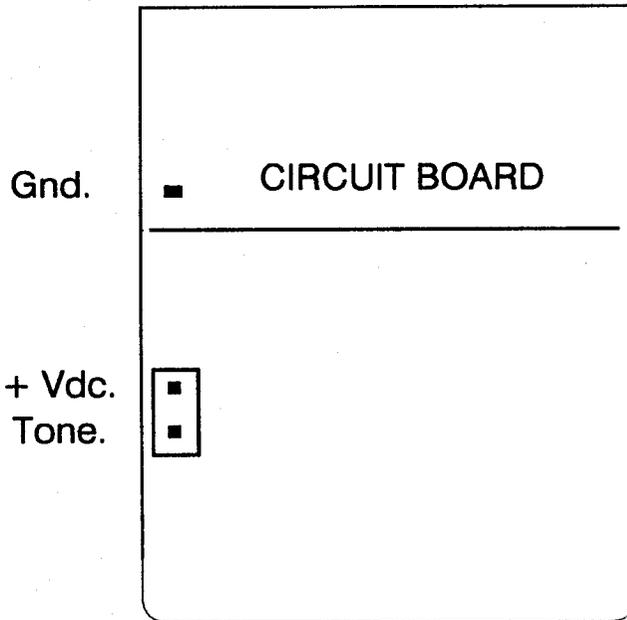

Communications Specialists, Inc.
 426 W. Taft Ave., Orange, CA 92665-4296
 (714) 998-3021 (California), (800) 854-0547